

智慧水錶




EPD電磁流量計採用國際最新技術製造的高精度流量計，廣泛用於造紙、化工、電力、冶金、給排水、汙水處理、液體高壓計量、醫藥、食品、環保等行業，用於測量封閉管道中導電的非磁性液體和漿液。



養豬場



養雞場

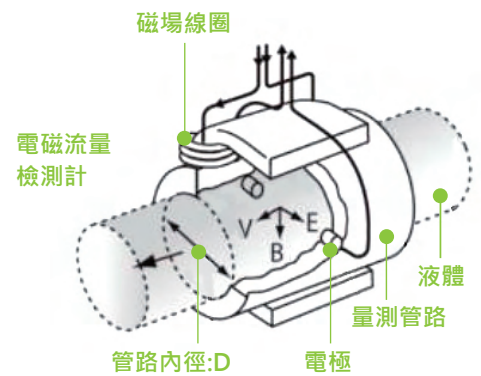

Item	EPD30 Standard type	EPD34 Remote type
Display	LCM 128*64 pixel backlit type	
Buttons	Tri-button operatio	
Communication interface	RS-485 (Modbus) (Optional support for ZigBee Pro wireless transmission)	
Accuracy	±0.5% of reading@1m/s(0.2% optional)	
Medium temperature	-20 ~ 120 BC(PTFE Lining)	
Ambient temperature	-40 ~ 70 °C *	
Fluidic conductivity	> 5 uS/cm	
Measuring scope	0.1m/s ~ 10m/s	

Item	EPD30 Standard type	EPD34 Remote type
Current output accuracy	0.1% of Pulse Output Accuracy Temperature coefficient (1000ppm/°C)	
Operating pressure	16 Kg/ cm ²	
Current output mode	Proactive	
Analog output	4 ~ 20 mA	
Power consumption	< 10 W	
Excitation mode	Pulse DC	
Vibration regulation	IEC 60068-2-3	
EMC regulation	IEC / EN 61326-1 Class A table2	

產品特色

- * 24小時監控
- * 不受水質影響
- * 不易堵塞
- * 低維護成本
- * 使用年限長
- * 總量顯示11位