


環境感測器



高精度監測系統具備佈署快速及維護簡單的優勢，針對客戶的需求做不同氣體的監測，協助客戶由傳統畜牧方式轉型為智慧化精準畜牧。

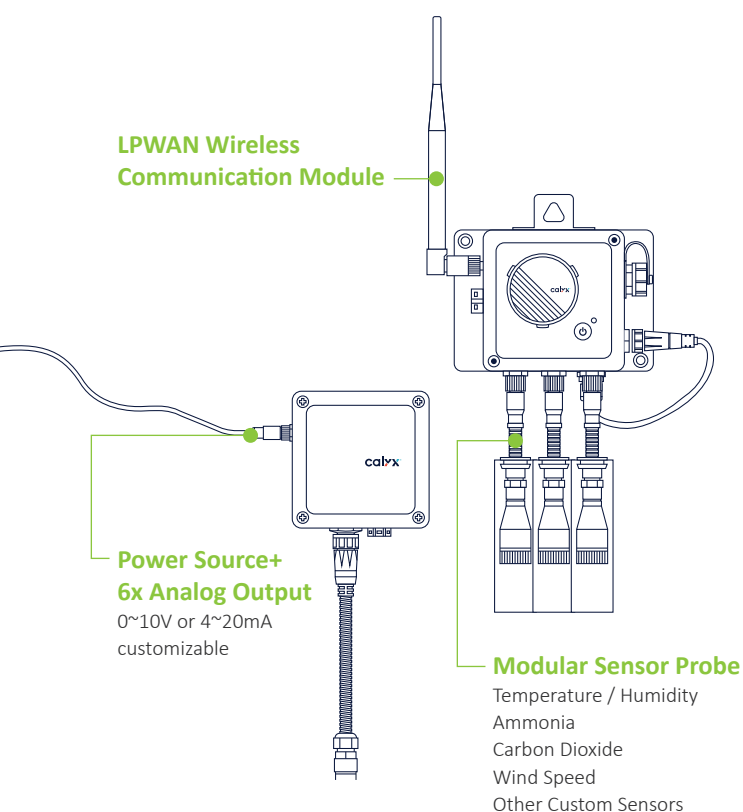

Item	EPD30 Standard type
Display	LCM 128*64 pixel backlit type
Buttons	Tri-button operation
Communication interface	RS-485 (Modbus) (Optional support for ZigBee Pro wireless transmission)
Accuracy	±0.5% of reading@1m/s(0.2% optional)
Medium temperature	-20 ~ 120 BC(PTFE Lining)
Ambient temperature	-40 ~ 70 °C *
Fluidic conductivity	> 5 uS/cm
Measuring scope	0.1m/s ~ 10m/s
Current output accuracy	0.1% of Pulse Output Accuracy Temperature coefficient (1000ppm/°C)
Operating pressure	16 Kg/ cm2
Current output mode	Proactive
Analog output	4 ~20 mA
Power consumption	< 10 W
Excitation mode	Pulse DC
Vibration regulation	IEC 60068-2-3
EMC regulation	IEC / EN 61326-1 Class A table2

產品特色

- * 24小時監控
- * 支援溫度、濕度、二氧化碳、氨氣
- * 警告設定 & 提醒
- * 5mins 快速安裝
- * 感應器無須校正